


FORCELLE


forks

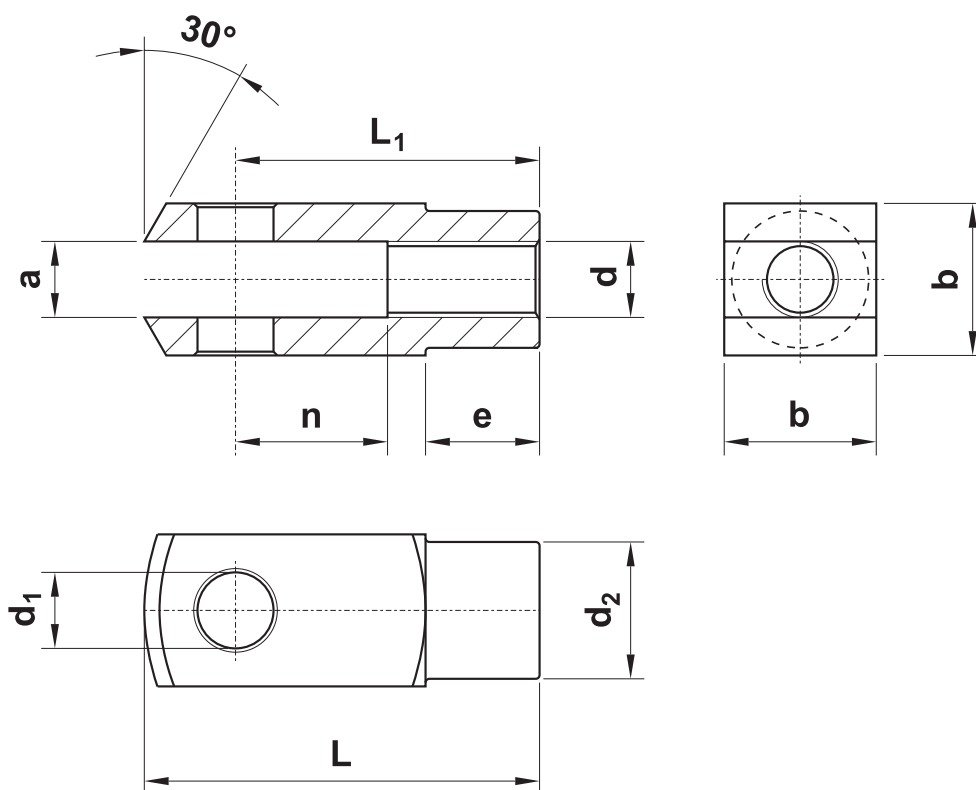

modello model	per alesaggi for bores	d	a	b	d ₁	d ₂	e	L	L ₁	n	fornita con it is supplied with
FR8C10	8-10	M4x0.7	4	8	ø4	ø8	6	21	16	8	clip
FR12C16	12-16	M6x1	6	12	ø6	ø10	9	31	24	12	clip
FRC20	20	M8x1.25	8	16	ø8	ø14	12	42	32	16	clip
FR25C32	25-32	M10x1.25	10	20	ø10	ø18	15	52	40	20	clip
FRC40	40	M12x1.25	12	24	ø12	ø20	18	62	48	24	clip
FR50C63	50-63	M16x1.5	16	32	ø16	ø26	24	83	64	32	clip
FR80C100	80-100	M20x1.5	20	40	ø20	ø34	30	105	80	40	clip
FRC125	125	M27x2	30	55	ø30	ø48	38	148	110	54	perno <i>[pin]</i>
FR160C200	160-200	M36x2	35	70	ø35	ø60	40	188	144	72	perno <i>[pin]</i>

CLIPS PER FORCELLE


clips for forks

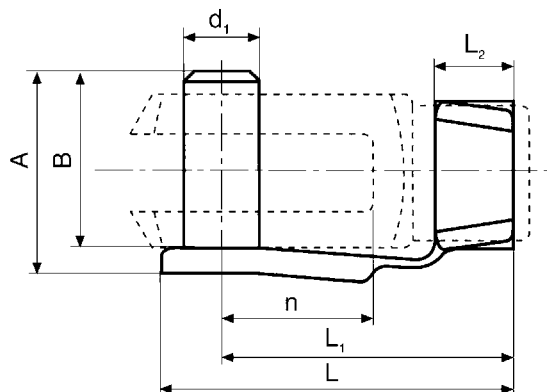

usata per forcella it is used for fork	d ₁	n	A	B	L	L ₁	L ₂
M4x0.7	4	8	11	9	19	15	5
M6x1	6	12	16	14	28	23	6
M8x1.25	8	16	22	19	37	31	8
M10x1.25	10	20	26	23	46	39	10
M12x1.25	12	24	32	28	55	47	12
M16x1.5	16	32	40	36	72	62	14
M20x1.5	20	40	48	44	88	72	16

PERNI PER FORCELLE

pins for forks

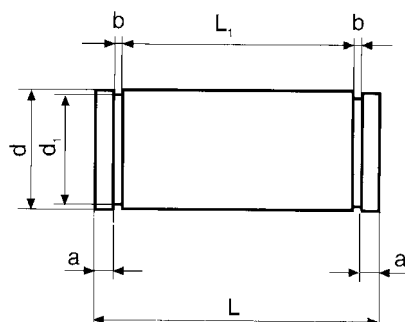

usato per forcella it is used for fork	d	L	d ₁	L ₁	a	b
M27x2	30	65	28.6	55	3.4	1.6
M36x2	35	84	33.4	70	5.4	1.6

DADI PER STELO


nuts for piston-rod



sigla part number	codice code	per alesaggio for bore	filetto thread	chiave key
DSMC8-10	26.196.2	8-10	M4x0.7	7
DSMC12-16	26.197.2	12-16	M6x1	10
DSMC20	26.198.2	20	M8x1.25	13
DSIS032	21.750.0	25-32	M10x1.25	17
DSIS040	21.751.0	40	M12x1.25	19
DSIS05063	21.752.0	50-63	M16x1.5	24
DSIS080100	21.753.0	80-100	M20x1.5	30
DSIS125	21.754.0	125	M27x2	41
DSIS160200	21.755.0	160-200	M36x2	55

TESTE A SNODO


jointing balls

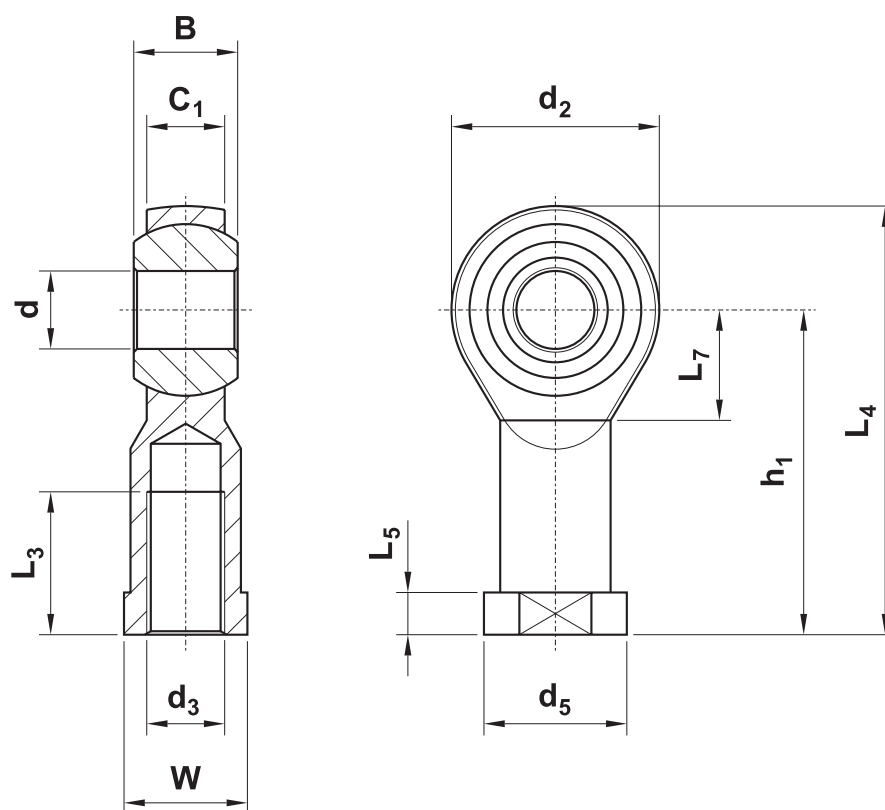

modello model	per alesaggi for bores	d ₃	d	B	C ₁	d ₂	d ₅	h ₁	L ₃	L ₄	L ₅	L ₇	W
TS8T10	8-10	M4x0.7	ø5	8	6	18	ø11	27	10	36	4	10	9
TS12T16	12-16	M6x1	ø6	9	6.75	20	ø13	30	12	40	5	11	11
TST20	20	M8x1.25	ø8	12	9	24	ø16	36	16	48	5	13	14
TS25T32	25-32	M10x1.25	ø10	14	10.5	28	ø19	43	20	57	6.5	15	17
TST40	40	M12x1.25	ø12	16	12	32	ø22	50	22	66	6.5	17	19
TS50T63	50-63	M16x1.5	ø16	21	15	42	ø27	64	28	85	8	23	22
TS80T100	80-100	M20x1.5	ø20	25	18	50	ø34	77	33	102	10	27	30
TST125	125	M27x2	ø30	37	25	70	ø50	110	51	145	15	36	41
TS160T200	160-200	M36x2	ø35	43	28	80	ø58	125	56	165	17	41	50

SNODI AUTOALLINEANTI

self-aligning joints

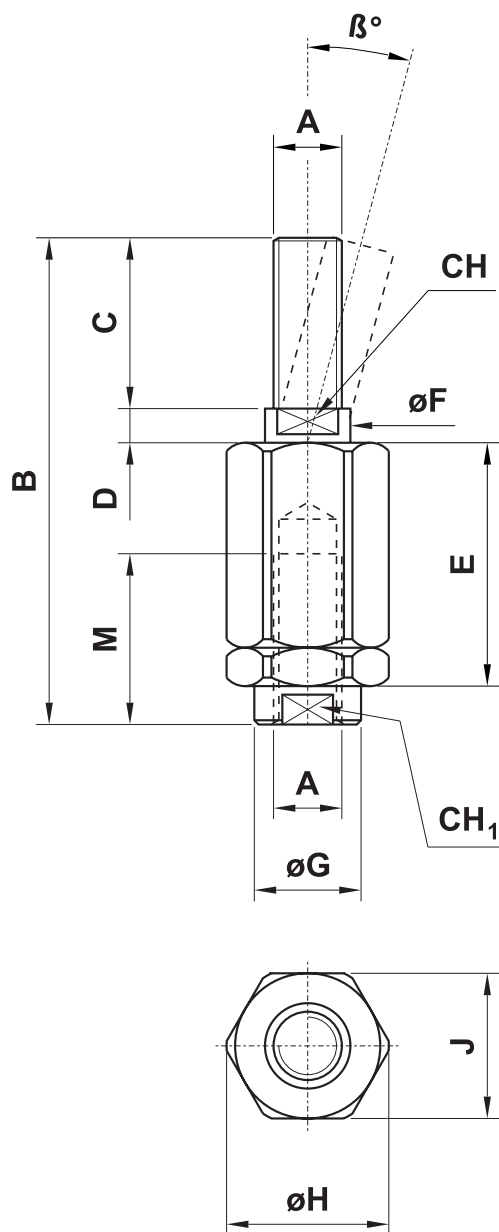

modello model	per alesaggi for bores	A	B	C	D	E	F	G	H	J	M	CH	13°	CH ₁
SN12D16	12-16	M6x1	35	10	3.5	17.5	6	8.5	14.5	13	10	5	10	7
SND20	20	M8x1.25	57	20	4	28.5	8	12.5	19	17	20	7	10	11
SN25D32	25-32	M10x1.25	71	20	5	35	14	22	32	30	20	12	10	19
SND40	40	M12x1.25	75	24	5	35	14	22	32	30	20	12	10	19
SN50D63	50-63	M16x1.5	103	32	8	54	22	32	45	41	32	20	10	30
SN80D100	80-100	M20x1.5	119	40	8	54	22	32	45	41	40	20	10	30